










		DOOR	STRUCTURAL ASSEMBLY EXTERIOR FRAME DIMENSIONS									
SINGLE DOOR			1 1/4 x 4 5/8		1 1/4 x 6 5/8		1 5/8 x 6 7/16		1 3/16 x 7 1/4		1 1/4 x 9 1/4	
		32	33 3/4	82 1/2	33 3/4	82 1/2	34 5/8	82 7/8	33 5/8	82 1/2	33 3/4	82 1/2
		34	35 3/4	82 1/2	35 3/4	82 1/2	36 5/8	82 7/8	35 5/8	82 1/2	35 3/4	82 1/2
		36	37 3/4	82 1/2	37 3/4	82 1/2	38 5/8	82 7/8	37 5/8	82 1/2	37 3/4	82 1/2
SINGLE DOOR + 1 SIDELITE (a)			1 1/4 x 4 5/8		1 1/4 x 6 5/8		1 5/8 x 6 7/16		1 3/16 x 7 1/4		1 1/4 x 9 1/4	
		32	48 3/8	82 1/2	48 3/8	82 1/2	49 1/4	82 7/8	48 1/4	82 1/2	48 3/8	82 1/2
		34	50 3/8	82 1/2	50 3/8	82 1/2	51 1/4	82 7/8	50 1/4	82 1/2	50 3/8	82 1/2
		36	52 3/8	82 1/2	52 3/8	82 1/2	53 1/4	82 7/8	52 1/4	82 1/2	52 3/8	82 1/2
SINGLE DOOR + 2 SIDELITES (a)			1 1/4 x 4 5/8		1 1/4 x 6 5/8		1 5/8 x 6 7/16		1 3/16 x 7 1/4		1 1/4 x 9 1/4	
		32	62 7/8	82 1/2	62 7/8	82 1/2	63 3/4	82 7/8	62 3/4	82 1/2	62 7/8	82 1/2
		34	64 7/8	82 1/2	64 7/8	82 1/2	65 3/4	82 7/8	64 3/4	82 1/2	64 7/8	82 1/2
		36	66 7/8	82 1/2	66 7/8	82 1/2	67 3/4	82 7/8	66 3/4	82 1/2	66 7/8	82 1/2
DOUBLE DOOR			1 1/4 x 4 5/8		1 1/4 x 6 5/8		1 5/8 x 6 7/16		1 3/16 x 7 1/4		1 1/4 x 9 1/4	
		32	66 1/4	82 1/2	66 1/4	82 1/2	67 1/8	82 7/8	66 1/8	82 1/2	66 1/4	82 1/2
		34	70 1/4	82 1/2	70 1/4	82 1/2	71 1/8	82 7/8	70 1/8	82 1/2	70 1/4	82 1/2
		36	74 1/4	82 1/2	74 1/4	82 1/2	75 1/8	82 7/8	74 1/8	82 1/2	74 1/4	82 1/2
CHÂTEAU II DOOR C-100							1 5/8 x 6 7/16		1 3/16 x 7 1/4			
		32					67 1/8	82 7/8	66 1/8	82 1/2		
		34					71 1/8	82 7/8	70 1/8	82 1/2		
		36					75 1/8	82 7/8	74 1/8	82 1/2		
CHÂTEAU II DOOR (b) C-200							1 5/8 x 6 7/16		1 3/16 x 7 1/4			
		28	5 pi				59 1/8	79 5/8	58 1/8	79 5/16		
		34	6 pi				71 1/8	79 5/8	70 1/8	79 5/16		
DOUBLE DOOR or CHÂTEAU II DOOR C-100 + 1 SIDELITE			1 1/4 x 4 5/8		1 1/4 x 6 5/8		1 5/8 x 6 7/16		1 3/16 x 7 1/4		1 1/4 x 9 1/4	
		32	80 3/4	82 1/2	80 3/4	82 1/2	81 5/8	82 7/8	80 5/8	82 1/2	80 3/4	82 1/2
		34	84 3/4	82 1/2	84 3/4	82 1/2	85 5/8	82 7/8	84 5/8	82 1/2	84 3/4	82 1/2
		36	88 3/4	82 1/2	88 3/4	82 1/2	89 5/8	82 7/8	88 5/8	82 1/2	88 3/4	82 1/2
DOUBLE DOOR or CHÂTEAU II DOOR C-100 + 2 SIDELITES			1 1/4 x 4 5/8		1 1/4 x 6 5/8		1 5/8 x 6 7/16		1 3/16 x 7 1/4		1 1/4 x 9 1/4	
		32	95 1/2	82 1/2	95 1/2	82 1/2	96 3/8	82 7/8	95 3/8	82 1/2	95 1/2	82 1/2
		34	99 1/2	82 1/2	99 1/2	82 1/2	100 3/8	82 7/8	99 3/8	82 1/2	99 1/2	82 1/2
		36	103 1/2	82 1/2	103 1/2	82 1/2	104 3/8	82 7/8	103 3/8	82 1/2	103 1/2	82 1/2
TRIPLE DOOR (c) or CHÂTEAU II DOOR C-100 TRIPLE (d)			1 1/4 x 4 5/8		1 1/4 x 6 5/8		1 5/8 x 6 7/16		1 3/16 x 7 1/4		1 1/4 x 9 1/4	
		32	98 3/4	82 1/2	98 3/4	82 1/2	99 3/4	82 7/8	98 5/8	82 1/2	98 3/4	82 1/2
		34	104 3/4	82 1/2	104 3/4	82 1/2	105 3/4	82 7/8	104 5/8	82 1/2	104 3/4	82 1/2
		36	110 3/4	82 1/2	110 3/4	82 1/2	111 3/4	82 7/8	110 5/8	82 1/2	110 3/4	82 1/2

All measurements are indicated in inches.

Height and width tolerance of about + or - 1/8", same dimension if cladded inside or not.

Door height (slab) 79".

a) For an opening sidelite with astragal, add 1/8" in width.

b) Door height (slab) 75 3/4", for the C-200.

c) Two opening doors and one fixed.

d) Available only with one opening and two fixed doors.



## One Passion, Three Generations...

Alexandre Roberge began his modest business in 1917 in La Sarre in the Abitibi region of Quebec. Both a skilled woodworker and passionate about a quality product, he made all his wood windows and doors by hand.

In 1950, Roberge became the largest company of its kind in Abitibi-Ouest. It was also in 1950 that Alexandre's 20-year-old son, Jean-Guy, joined his father in the family business and eventually took over from him in 1960. A big challenge for a young man of 30! He proved to have the same passion for the business as his father and established a door and window production line and distribution network stretching from Abitibi-Temiscamingue to Northern Ontario.

Towards the end of the 1970s, the passion for the family business was passed on to the third generation, when grandsons Pierre and Ga  tan joined the ranks. Since that time, ongoing modernization in the door and window plant has helped the company deliver a product continuously better adapted to the demands of a northern climate.

From 1999 to 2011, the company opened four new branches: first in Gatineau, then Ottawa, Saint-Hubert and Nepean. Today, the company employs more than 150 throughout Quebec. Through the same spirit of initiative, determination and passion that guided three generations, Roberge & Fils has written almost 100 years of history!



### Our Guarantee

All of our products are guaranteed.

Refer to the Roberge certificate of guarantee for more information.



### THE Energy STAR ADVANTAGE

Products that qualify for the ENERGY STAR mark have been independently tested and certified to be among the most energy-efficient on the market, so installing them in your home will reduce your energy consumption and save you money. But there's more: energy-efficient products will also increase your comfort, cut down noise levels from outside the home, have less condensation in cold weather than standard products, and allow fewer ultraviolet rays to pass through, thus better protecting your valuables from sun damage.



#### HEAD OFFICE

45 7<sup>th</sup> Avenue East, La Sarre (Quebec) J9Z 1M5

Distributed by:

#### BRANCH OFFICES:

##### GATINEAU

573 Maloney Boulevard East  
Gatineau (Quebec) J8P 1E9  
Telephone: 819-246-0375  
Toll-free: 1-866-663-9011  
Fax: 819-663-2178

##### OTTAWA

850 Industrial Ave, unit 9  
Ottawa (Ontario) K1G 4K2  
Telephone: 613-736-7463  
Fax: 613-736-8813

##### SAINT-HUBERT

3695 Taschereau Boulevard  
Saint-Hubert (Quebec) J4T 2G3  
Telephone: 450-445-2223  
Toll-free: 1-866-344-3695  
Fax: 450-445-2221

##### NEPEAN

1891 Merivale Road  
Nepean (Ontario) K2G 1E5  
Telephone: 613-224-1917  
Toll-free: 1-855-224-1917  
Fax: 613-224-0089

[www.roberge1917.com](http://www.roberge1917.com)



## STEEL DOORS

Superior  
Performance  
and Design





# Château II

Terrace door composed of two superior quality white steel doors.




### Specifications

- “Celcolor” 1 3/4” superior quality white steel door finished with thermo-hardened polyester, insulated with polyurethane foam, 24-gauge steel, protective vinyl strip on the lock jamb and standard 18” lock block, 20 year guarantee;
- One fixed door and one opening, structurally assembled with a 100% cellular PVC mullion;
- 1 5/8” x 6 7/16” or 1 3/16” x 7 1/4” finger-jointed pine frame available. The exterior of the frame can be clad in white vinyl or colored aluminum;
- Composed of two standard 20” x 64” door glass inserts with Low-E argon energy-efficient glass and PVC frame with screw-concealing strip; can be paired with the model of door glass of your choice, except model C200 5’ that is composed of two 17” x 64” door glass inserts only;
- Each unit includes a durable fibreglass mesh sliding screen door fitted with 4 individually adjustable rollers and mounted on ball bearings;
- This door can be opened towards the inside with the screen on the outside or towards the outside with the screen on the inside.

- **Included:** 3 hinges, white magnetic weather-stripping and compression, polyflex weather-stripping on 3 sides, insulated anodized aluminum sill and factory-installed adjustable bottom sweep on every door.

### Door Openings (exterior view)



### Door Designs



\*Note: Sealed Georgian white aluminum grill.

# Steel Door

Superior quality white steel door.



### Specifications

- 1 1/4” x 4 5/8”, 1 1/4” x 6 5/8”, 1 5/8” x 6 7/16”, 1 3/16” x 7 1/4” and 1 1/4” x 9 1/4” finger-jointed pine frame. The frame can be clad in white vinyl or colored aluminum;
- Double glazing with Low-E argon energy-efficient glass and PVC frame with screw-concealing strip on almost every model;
- “Celcolor” 1 3/4” superior quality white steel door finished with thermo-hardened polyester, insulated with polyurethane foam, 24-gauge steel, protective vinyl strip on the lock jamb and standard 18” lock block, 20 year guarantee;
- Standard hole for handle;
- **Included:** hinges, white magnetic weather-stripping and compression, polyflex weather-stripping on 3 sides, insulated anodized aluminum sill and factory-installed adjustable bottom sweep.



Structural Assembly

# The Roberge Difference


## Door Mullion

### Characteristics:

- 100% cellular PVC mullion, no risk of degradation, allowing for structural assembly
- Improved appearance, increased luminosity
- One piece head and sill
- Less caulking joints, reducing the risk of water infiltration
- Easier to install

### Performance:

- The single door with sidelite has a **C3** wind resistance rating (CAN/CSA A440-00 standard), contrary to a modular assembly offering only C2.

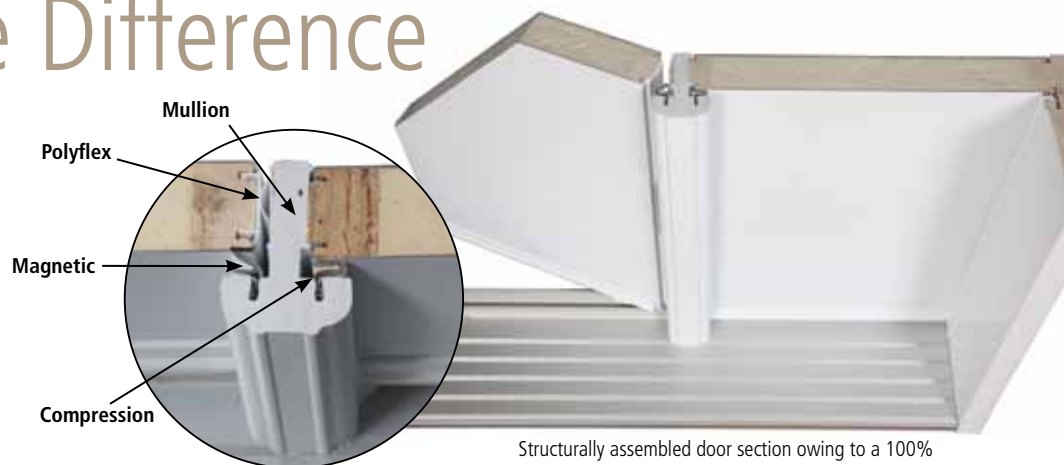

Double weather-stripping system adapted to counteract winter cold, magnetic on both the handle side and the top, compression on the hinge side and polyflex on 3 sides.

Structurally assembled door section owing to a 100% cellular PVC mullion between the door and the sidelite.

## Stained-glass

Enhance your door with a stained-glass insert to personalize it to the style of your home. Choose from a wide variety of stained-glass options.

## Colors

Your door can be painted, with the possibility of different colors on each side. Choose from a wide variety of available colors. If we don't have a sample of the color you're looking for, we can create it for you.



## Hinges



**Standard**  
Standard hinges:  
silver and brass

**Optional**  
Spring hinges  
satin-finished chrome  
and brass

**Optional**  
Ball-bearing hinges with steeple tips:  
venetian bronze, antique brass, antique nickel,  
satin nickel, bright brass and flat black

## Extensions



Interior extensions  
available: 3 3/8”, 5 7/16” or 7”

Interior trim available,  
with or without rosette

## Frames and Components



1 5/8” x 6 7/16” frame


1 3/16” x 7 1/4” frame

Superior quality insulated white steel door, 24-gauge, with protective vinyl strip on the lock jamb

Adjustable bottom sweep and insulated anodized aluminum sill with thermal break

4 optional brick mouldings available, 3 in PVC and one in aluminum

## Sidelites

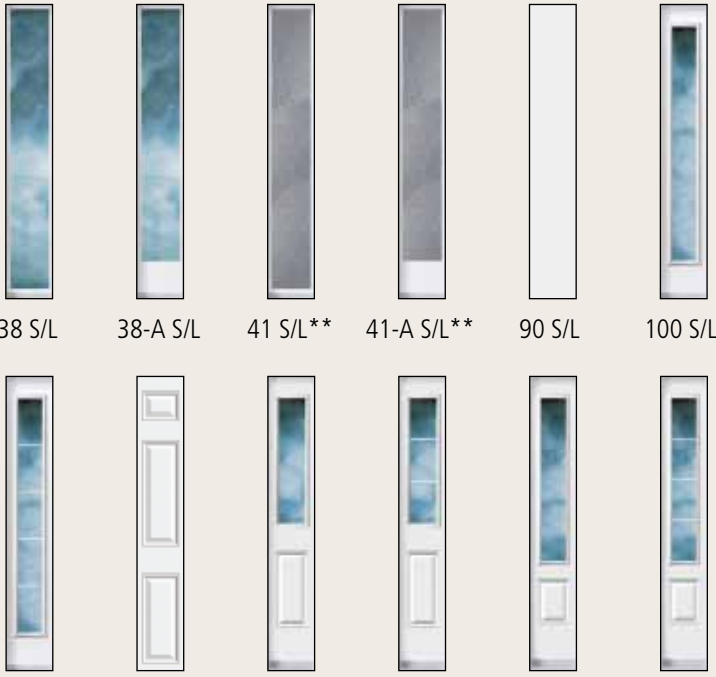

\*\*Note: Thermo pane only available with 1 side frosted in Pinhead Morocco (standard).